



Electrical



Smart Multimeter 800 Series

Innovative 'one-touch' operation multimeter that employs intelligent technology to automatically select the value being measured. The unit completely auto detects and auto ranges on CD, AC and Ohms. Easy to read display with auto power off to conserve battery life. Small enough to be kept in your pocket. Impedance 5 MOhm

BA 5067



Battery Isolator Switch

Easily fitted, allows battery to be isolated. Features a removable key for extra security

BA 130

BA 130S Silver Terminals



Auxiliary Battery System

With all the demands put on the battery of a serious off-road vehicle, an auxiliary battery is a sensible accessory. To run that battery you will need a split charge system. The T-Max dual battery system automatically links two batteries for charging, but isolates them when discharging. It has a manual over-ride feature, and a built in safety protection. The system is 12v with a 180A load capacity. Kit includes: Solenoid, display unit all necessary wiring and connectors and full instructions.

BA 2685

BA 2685A Split Charge Monitor



Smart Charge 4 AMP - RING

Waterproof charger supplied with fully insulated power connectors and battery terminal connectors.

RING - Smart-Chargers use 'Plug and Play' technology to charge most types of lead acid batteries.

They can recover damaged or deeply discharged batteries and deliver a battery back to its optimum performance.

Smart Features: Automatic 3 stage battery charger - Battery reconditioning
Rapid charge override - Remote battery check

Suitable for all battery types

BA 5116



Smart Charge 16 AMP- RING

Increased 16amp charging capacity. Supplied with tangle free leads which store in the charger.

BA 5117





Agricultural, Commercial & HGV Booster Cables

Fully insulated heavy duty clamps for additional safety supplied in a protective nylon bag, suitable for LGV and Commercial use. Cross section area of cable is 35mm², cable length is 4.5m

BA 5100



Heavy Duty Powerpack

The ultimate camping and recreational companion, that includes an integral 300w inverter and 250psi air compressor complete with adaptors. The powerpack has a high power and long life battery, automatic power shut off on clamp release, 2 x DC auxiliary power outlets, in-vehicle charging adapter, adapter for 240v charging.

BA 5101



Powersource Plus 500

500w (800 Peak). The PowerSource Plus 500 is an ideal leisure accessory - plug into your car battery to give a 240v output. It is safe to use on DVD players, lighting (not fluorescent), mobile phone chargers, electronic note pads, videos, computer consoles, laptop computers, camcorders, stereos, small fridges, medium power tools and colour televisions.

BA 5102



Multi Voltage In-Car Power Charger

Multi voltage in-car power adaptor with USB. Comes with 8 adaptors. For powering most portable devices including: MP3 players, SatNav, radio and games consoles.

BA 5119



Compact Inverter

No car should be without one - a conveniently sized inverter which simply plugs into the cigar lighter of your vehicle and converts the 12v DC to 240v AC household electrical power. You can operate mobile office equipment and household appliances up to 6amps from your car, van, motorhome or boat.

Run your mobile phone charger, laptop computer, playstation, camera charger, portable lights and MP3 player.

Will not run heating appliances like irons and kettles. - Auto shutdown to protect against overload, short circuit or overheating - USB power output - LED light to indicate operation - Compact and lightweight, easily stored in glovebox.

BA 5113

Twin 12v Multi-Socket

The RING Multi-Socket range has superior quality, design and functionality to compliment the high value devices which are plugged into them. Both models have an LED guide light and adjusting fitment collar. 0° to 90° 4 Position adjustable plug

BA 5114



Twin 12v Multi-Socket

The RING Battery Analyser. Mounting arms and coiled cable with plug attached

BA 5115



12v Multi Socket (Battery Analyser)

3 Way Multi-Socket Adaptor which has a battery analyser. Great for portable DVD players, mobile phones etc.

BA 5134



12v Car Multi-socket with Twin USB

In car Multi-socket Charger with 2x USB adaptors and 2x cigarette lighter adaptors. Max 10A. Has a battery analyser to monitor your battery.

BA 5138



USB Charging Adaptor 12v/24v

MP3 and Mobile Phone recharging adaptor that allows you to charge your devices on the go. Output 5v, 0.5A max.

BA 5135





In Car Battery Charger 12v

In car battery charger that charges AA and AAA rechargeable batteries.

BA 5136



Air Inflator

12v Air inflator and deflator. Fitted with fused 12v cigarette lighter plug. Complete with 3 adaptor nozzles suitable for inflating air beds and other leisure accessories. Comes with storage bag.

BA 5133



Digital Air Compressor

Operates from your vehicle 12v power socket, 4m Power lead - Inflates to preset pressure using LCD display with automatic cut off - Complete with one nozzle adaptor and one needle adaptor for small inflatables and footballs etc.

BA 2684



T-Max Portable Air Compressor

A powerful compressor from T-Max. Robustly constructed and supplied with coiled air-line, fitted pressure gauge and its own carry bag. Runs from your vehicle's battery giving an air-flow of 72 litres per min and a working pressure of 150psi

BA 2641



T-Max Double Pump Air Compressor

Similar to BA 2641 but with a double pump for greater performance. With overload protector and automatic reset. Supplied with air pipe, gauge and tyre fittings all in a smart canvas holdall.

Max Output - 110Lts per min
Max Pressure - 150psi
Cylinder diam - 40mm
Max Amp draw - 45A

BA 2663

Tropicool Bord-Bar

This in-car coolbox features LED indicators for temperature, battery monitor, safety belt fixing, switches for cold or warm functions, fold up tray, serves as an armrest for comfort when fitted to back seat

Capacity 15 Ltrs
Voltage 12v DC
Consumption 54 watts
Temp Range -20° to +65°
Weight 5.2Kgs : Size 358x282x328mm

BA 3210



Tropicool Freshbag

This box features soft textile outer with shoulder strap and roller shutter closure; 3 exterior pockets. Deep enough to take 3x2Ltr bottles :

Capacity 14 Ltrs
Voltage 12v DC
Consumption 36 watts
Temp Range -20°C below ambient temp
Size 420x250x395mm : Weight 4.6Kgs

BA 3211



Tropicool Classic

This box is large enough for a long car journey or family picnic and features 7 stage electronic thermostat with LED indicators, integrated mains supply, detachable lid with magnetic lock, internal divider.

Capacity 21 Ltrs
Voltage 12v/24v DC or 12/230v DC/AC
Consumption 60-70 watts
Temp Range 30°C below ambient temp
Weight 6Kgs : Size 450x303x420mm

BA 3212



Coolmatic CF-18

A truly portable cooler/freezer fitted with a Danfoss compressor to give exceptional cooling performance. Features detachable lid, interior light, sturdy carrying handle and internal divider.

Capacity 18 Ltrs
Voltage 12v/24v DC
Consumption 35 watts
Temp Range -18°C to +10°C
Weight 11.5Kgs : Size 465x300x414 mm

BA 3213



Coolmatic CF-35


Can be used almost anywhere in the world - the integrated power supply unit identifies the voltage and adjusts itself accordingly.

Mounting kit available for safe fixing in a vehicle.

The Danfoss compressor gives exceptional performance for cooling or freezing.

Capacity 31 Ltrs
Voltage 12v/24v DC and 110-240v AC
Consumption 45 watts
Temp Range -18°C to +10°C
Weight 15Kgs : Size 580x360x385mm

BA 3214

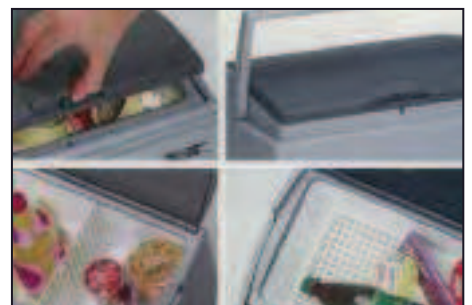



Winching Towing

Winches

PART NUMBER	BRAND	DESCRIPTION	RATED LINE PULL (SINGLE LINE)	MOTOR	REMOTE CONTROL
BA 2603	T-Max	EW	6500Lbs (2950Kgs)	5.5HP Series Wound	Included (Cable)



GEAR TRAIN	Planetary 3 Stage
GEAR RATIO	172.8:1
CLUTCH	Shift Pin Ring Gear
BRAKE	Automatic in-the-drum
ROPE	Wire 24mx7.2mm (dia)
FAIRLEAD	Hawse Fairlead
RECOMMENDED BATTERY	650CCA min for winching
WEIGHT	30Kgs
DIMENSIONS	470x160x205mm
MOUNTING PATTERN	166.4x114.3mm
DRUM SIZE	
BATTERY LEAD	

PART NUMBER	BRAND	DESCRIPTION	RATED LINE PULL (SINGLE LINE)	MOTOR	REMOTE CONTROL
BA 2604	T-Max	EW	9500Lbs (4300Kgs)	5.5HP/12v Series Wound	Included (Cable 3.7m)
BA 26042	T-Max	EW	9500Lbs (4300Kgs)	6HP/24v Series Wound	Included (Cable 3.7m)

GEAR TRAIN	Planetary 3 Stage
GEAR RATIO	218:1
CLUTCH	Sliding Ring Gear
BRAKE	Automatic in-the-drum
ROPE	Wire 28.5mx8.2mm (dia)
FAIRLEAD	4-Way Roller
RECOMMENDED BATTERY	650CCA min for winching
WEIGHT	38Kgs
DIMENSIONS	537x160x218mm
MOUNTING PATTERN	254x114.3mm
DRUM SIZE	
BATTERY LEAD	



PART NUMBER	BRAND	DESCRIPTION	RATED LINE PULL (SINGLE LINE)	MOTOR	REMOTE CONTROL
BA 2605	T-Max	EW	11000Lbs (4985Kgs)	5.5HP/12v Series Wound	Included (Cable 3.7m)
BA 26052	T-Max	EW	11000Lbs (4985Kgs)	6HP/24v Series Wound	Included (Cable 3.7m)



GEAR TRAIN	Planetary 3 Stage
GEAR RATIO	265:1
CLUTCH	Sliding Ring Gear
BRAKE	Automatic in-the-drum
ROPE	Wire 28.5mx8.2mm (dia)
FAIRLEAD	4-Way Roller
RECOMMENDED BATTERY	650CCA min for winching
WEIGHT	40Kgs (43Kgs with wire)
DIMENSIONS	541x160x218mm
MOUNTING PATTERN	254x114.3mm
DRUM SIZE	
BATTERY LEAD	

PART NUMBER	BRAND	DESCRIPTION	RATED LINE PULL (SINGLE LINE)	MOTOR	REMOTE CONTROL
BA 2609	T-Max	Outback	9000Lbs (4080Kgs)	5.5HP/12v	Included (Cable 3.7m)
BA 2610	T-Max	Outback	9000Lbs (4080Kgs)	5.5HP/12v	Included (Radio)

GEAR TRAIN	Planetary 3 Stage
GEAR RATIO	172.8:1
CLUTCH	Sliding Ring Gear
BRAKE	Automatic in-the-drum
ROPE	Wire 28.5mx9.2mm (dia)
FAIRLEAD	4-Way Roller
RECOMMENDED BATTERY	650CCA min for winching
WEIGHT	36.5Kgs
DIMENSIONS	557x205x160mm
MOUNTING PATTERN	254x114.3mm
DRUM SIZE	224x64mm (dia)
BATTERY LEAD	



PART NUMBER	BRAND	DESCRIPTION	RATED LINE PULL (SINGLE LINE)	MOTOR	REMOTE CONTROL
BA 2611	T-Max	Outback	9,500Lbs (4532Kgs)	5.5HP/12v Series Wound	Included (Cable 3.7m)
BA 2612	T-Max	Outback	9,500Lbs (4532Kgs)	5.5HP/12v Series Wound	Included (Radio)




GEAR TRAIN	Planetary 3 Stage
GEAR RATIO	218:1
CLUTCH	Sliding Ring Gear
BRAKE	Automatic in-the-drum
ROPE	Wire 28.5mx9.2mm (dia)
FAIRLEAD	4-Way Roller
RECOMMENDED BATTERY	650CCA min for winching
WEIGHT	38Kgs
DIMENSIONS	537x160x218mm
MOUNTING PATTERN	254x114.3mm
DRUM SIZE	224x64mm (dia)
BATTERY LEAD	

PART NUMBER	BRAND	DESCRIPTION	RATED LINE PULL (SINGLE LINE)	MOTOR	REMOTE CONTROL
BA 2615	T-Max	Outback	12,500Lbs (5665Kgs)	5.5HP/12v Series Wound	Included (Cable 3.7m)
BA 2616	T-Max	Outback	12,500Lbs (5665Kgs)	5.5HP/12v Series Wound	Included (Radio)

GEAR TRAIN	Planetary 3 Stage
GEAR RATIO	265:1
CLUTCH	Sliding Ring Gear
BRAKE	Automatic in-the-drum
ROPE	Wire 28.5mx9.2mm (dia)
FAIRLEAD	4-Way Roller
RECOMMENDED BATTERY	650CCA min for winching
WEIGHT	40Kgs (43Kgs with wire)
DIMENSIONS	541x160x218mm
MOUNTING PATTERN	254x114.3mm
DRUM SIZE	224x64mm (dia)
BATTERY LEAD	




PART NUMBER	BRAND	DESCRIPTION	RATED LINE PULL (SINGLE LINE)	MOTOR	REMOTE CONTROL
BA 2621	T-Max	Outback	15,000Lbs (6800Kgs)	6HP/12v Series Wound	Included (Cable 3.7m)
BA 2623	T-Max	Outback	15,000Lbs (6800Kgs)	6HP/24v Series Wound	Included (Cable 3.7m)

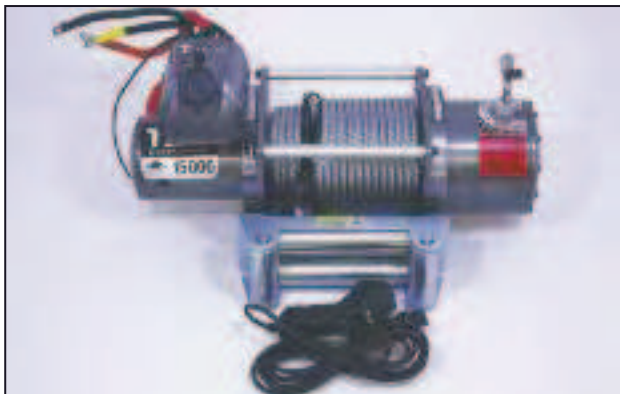


GEAR TRAIN	Planetary 3 Stage
GEAR RATIO	355:1
CLUTCH	Sliding Ring Gear
BRAKE	Automatic in-the-drum
ROPE	Wire 28.5mx10.5mm (dia)
FAIRLEAD	Roller
RECOMMENDED BATTERY	650CCA min for winching
WEIGHT	65Kgs
DIMENSIONS	595x214x262mm
MOUNTING PATTERN	254x165.1mm
DRUM SIZE	224x92mm (dia)
BATTERY LEAD	1.83m x 35mm (dia)

PART NUMBER	BRAND	DESCRIPTION	RATED LINE PULL (SINGLE LINE)	MOTOR	REMOTE CONTROL
BA 2622	T-Max	Outback	15,000Lbs (6800Kgs)	6HP/12v Series Wound	Included (Cable 3.7m)
BA 2624	T-Max	Outback	15,000Lbs (6800Kgs)	6HP/24v Series Wound	Included (Cable 3.7m)

GEAR TRAIN	Planetary 3 Stage
GEAR RATIO	355:1
CLUTCH	Sliding Ring Gear
BRAKE	Automatic in-the-drum
ROPE	Wire 28.5mx10.5mm (dia)
FAIRLEAD	Roller
RECOMMENDED BATTERY	650CCA min for winching
WEIGHT	65Kgs
DIMENSIONS	595x214x262mm
MOUNTING PATTERN	254x165.1mm
DRUM SIZE	224x92mm (dia)
BATTERY LEAD	1.83m x 35mm (dia)

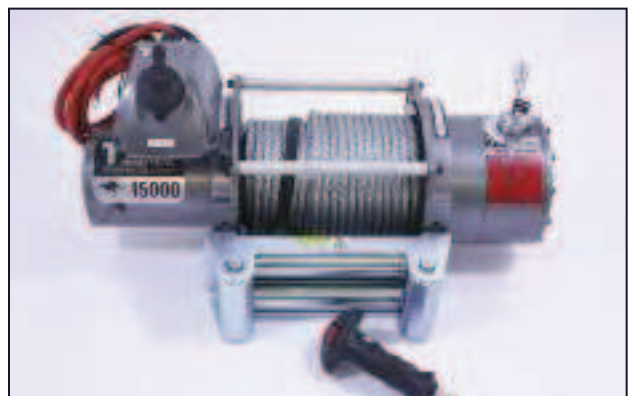

PART NUMBER	BRAND	DESCRIPTION	RATED LINE PULL (SINGLE LINE)	MOTOR	REMOTE CONTROL
BA 2607	T-Max	Outback	12,000Lbs (5440Kgs)	6.6HP/12v Series Wound	Included (Radio)
BA 26072	T-Max	Outback	12,000Lbs (5440Kgs)	6.6HP/24v Series Wound	Included (Radio)

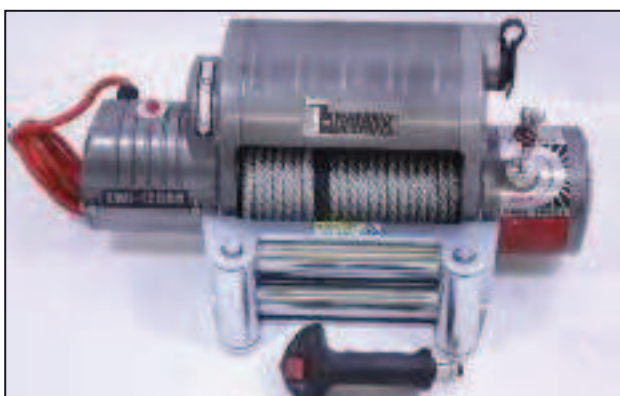


GEAR TRAIN	
GEAR RATIO	
CLUTCH	
BRAKE	
ROPE	Wire
FAIRLEAD	2-Way Roller
RECOMMENDED BATTERY	
WEIGHT	
DIMENSIONS	
MOUNTING PATTERN	
DRUM SIZE	
BATTERY LEAD	

PART NUMBER	BRAND	DESCRIPTION	RATED LINE PULL (SINGLE LINE)	MOTOR	REMOTE CONTROL
BA 2606	T-Max		12,500Lbs	12v	Included (Cable 3.7m)
BA 26062	T-Max		12,500Lbs	24v	Included (Cable 3.7m)

GEAR TRAIN
GEAR RATIO
CLUTCH
BRAKE
ROPE Wire
FAIRLEAD 4-Way Roller
RECOMMENDED BATTERY
WEIGHT
DIMENSIONS
MOUNTING PATTERN
DRUM SIZE
BATTERY LEAD



PART NUMBER	BRAND	DESCRIPTION	RATED LINE PULL (SINGLE LINE)	MOTOR	REMOTE CONTROL
BA 2608	T-Max	EWI	9,500Lbs	6.6HP/12v Series Wound	Included (Radio)

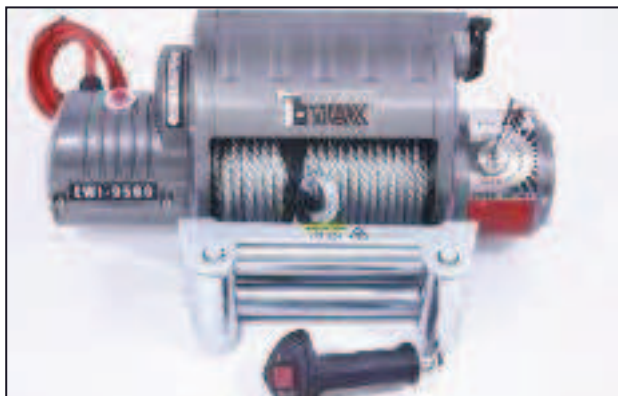

GEAR TRAIN
GEAR RATIO
CLUTCH
BRAKE
ROPE
FAIRLEAD 2-Way Roller
RECOMMENDED BATTERY
WEIGHT
DIMENSIONS
MOUNTING PATTERN
DRUM SIZE
BATTERY LEAD

PART NUMBER	BRAND	DESCRIPTION	RATED LINE PULL (SINGLE LINE)	MOTOR	REMOTE CONTROL
BA 2614A	T-Max	PEW	9,500Lbs	12v	Included (Radio)

GEAR TRAIN
GEAR RATIO
CLUTCH
BRAKE
ROPE Syn Rope
FAIRLEAD Aluminium
RECOMMENDED BATTERY
WEIGHT
DIMENSIONS
MOUNTING PATTERN
DRUM SIZE
BATTERY LEAD



PART NUMBER	BRAND	DESCRIPTION	RATED LINE PULL (SINGLE LINE)	MOTOR	REMOTE CONTROL
BA 2601	T-Max	2000lbs	2,000Lbs	0.85HP/12v	



GEAR TRAIN	
GEAR RATIO	
CLUTCH	
BRAKE	
ROPE	49'
FAIRLEAD	
RECOMMENDED BATTERY	
WEIGHT	5Kgs
DIMENSIONS	296x97x105mm
MOUNTING PATTERN	
DRUM SIZE	
BATTERY LEAD	

PART NUMBER	BRAND	DESCRIPTION	RATED LINE PULL (SINGLE LINE)
BA 2620	T-Max	Hand Winch	1600Kgs



PART NUMBER	BRAND	DESCRIPTION	RATED LINE PULL (SINGLE LINE)	MOTOR	REMOTE CONTROL
BA 024	Warn		8,000Lbs	12v	Remote Switch (12' lead)
BA 024A	Warn	CE Marked	8,000Lbs	12v	Remote Switch (12' lead)

GEAR TRAIN	Planetary 3 Stage
ROPE	80'x 5/16"



PART NUMBER	BRAND	DESCRIPTION	RATED LINE PULL (SINGLE LINE)	MOTOR	REMOTE CONTROL
BA 023	Warn	XD9000	9,000Lbs (4080Kgs)	12v	Remote Switch (12' lead)
BA 024B	Warn	XD9000	9,000Lbs (4080Kgs)	24v	Remote Switch (12' lead)



GEAR TRAIN
ROPE

Planetary 3 Stage
80'x 5/16"



Winch Cover - T-Max

BA 2638

Keeps your T-Max Winch free from the worst of the weather and muck and grime. Made from a strong weatherproof canvas with heavy duty eyelets to fix securely over the winch. (Will not fit EW12000)



Radio Control Box - T-Max

BA 2640

Retro-fit remote control box. Waterproof and features Wireless multi-control. Cable connection supplied in case of battery failure. Suits all T-Max winches and can be applied to many similar winches from other manufacturers.



Remote Control Switch

BA 2630

Suitable for non-radio control winches

(Replacement Part) Ergonomically designed hand held remote switch to suit all T-Max Winches)



Remote Control Set

BA 2630A

Late Winches

(Replacement Part) Ergonomically designed hand held remote switch to suit all T-Max Winches)



Radio Control & Receiver Kit

BA 2652

Suitable for Radio Control Winches

(Replacement Part) Ergonomically designed hand held remote switch to suit all T-Max Winches)



Solenoid 12v

BA 2631

500amp solenoid with silver coated contacts to suit T-Max winches



Solenoid 24v

BA 2636

500amp solenoid with silver coated contacts to suit T-Max winches



Integrated Solenoid Model

BA 2651A

500amp solenoid with silver coated contacts to suit T-Max winches



Control Box

BA 7329

Control box for late winch 12v



T-Max Quick Release Plugs

BA 2675

Pair

Heavy duty electric winch cables with quick release plugs for isolation or easy winch removal.



Power Cable with quick plugs

BA 2676

6m (1 red, 1 black)



Power Cable Only

BA 021

3.5m (1 red, 1 black)

Power Cable only

BA 021A

5m (1 red, 1 black)



Fairlead

BA 2672

Aluminium to suit Synthetic Rope

Fairlead

BA 2673

Stainless Steel



Roller Fairlead

BA 3091

Roller Fairlead

BA 2141



Roller Fairlead

BA 2666

Suitable for loads up to 6,500Lbs

T-Max Quick Mount

BA 2665

Allows portable use of your winch
- for use with Class 3 receivers.
Accepts up to 9,500Lb winches.



T-Max Winch Accessory Kit

BA 2613

Everything you need for a safe winching in one convenient holdall. Contains: Tree strop, snatch block, 2x'D' shackles, safety gloves, tow hook, holdall.

T-Max Snatch Block only

BA 3092
with pouch



Winch Accessory Kit

BA 2139

Contains: Tree strop 2mx75mm, snatch block, gloves and bag. (Breaking strain: 16,000Lbs (10 tons))

Winch Accessory Kit

BA 2139A

Contains: Choker chain, snatch block, 2mx100mm tree strop, gloves and bag (Breaking strain 16,000Lbs (10 tons))



Bow Shackle 4.75T


BA 2148

Suitable for heavy duty off-road recovery

Bow Shackle 8.5T

BA 2149

Suitable for heavy duty off-road recovery



Swivel Shackle


BA 2682

Very heavy construction with 4 point fixing through to backing plate.

Standard Jate Ring

BA 2683

Welded steel construction with bolt and locking nut.



Forged Jate Ring

BA 2683A

Forged steel. Suitable for heavy duty off-road recovery

T-Max Clevis Hook

BA 2639

3/8" Clevis hook used as replacement hook on T-Max winches or other eyelet cables or ropes.



T-Max Recovery Hook

BA 2667

Universal Coupling

BA 191

E - Marked

Towing capacity 3.5T 50mm ball, with 25mm (nominal) dia forged pin, (to suit towing eyes: min I.D. 28.6mm max section 28.6mm) 2 Bolt fixing, zinc plated finish



50mm Towball

BA 193

E - Marked

3500Kgs capacity, 2 hole fixing zinc plated finish.

Towing Eye

BA 5683

To suit tubular winch bumpers

Similar to Swivel Shackle BA 2682 but with different bold arrangement to suit tubular winch bumpers.



Bridle Rope

BA 2155

Synthetic rope with eyelets at each end. Lightweight yet with breaking strain of 10 Tonnes (2mx24mm)

Tow Rope

BA 3008

Lightweight yet with breaking strain of 10 Tonnes. Synthetic rope has eyelets at each end (4.5mx24mm)



Winch Wire

BA 024W

30m x 8mm

Winch Wire

BA 024WA

28m x 8.2mm



Winch Wire

BA 024H

27.5m x 9.2mm



Suitable for 11,000Lbs up

Kinetic Rope

BA 2147

4.5 x 24mm

8 Strand - for up to 12 Tonnes



Kinetic Rope

BA 2147A

8m x 24mm

8 Strand - for up to 12 Tonnes


Synthetic Rope 25mx10mm - inc Steel Hook

Many advantages over traditional cable, can be joined when broken, safer to use and easier to handle. The synthetic rope is covered with a 3m sheath on the drum to protect against heat and a 1m protective sheath at the hook end to protect against abrasion. Breaking strength approx 10,000Kgs

BA 2670 25m x 10mm

BA 2671 Competition

As BA 2670 but with larger hook.

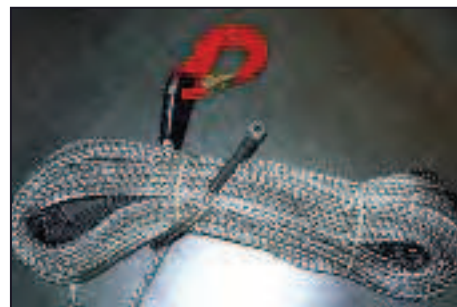

Viking Combo Line (inc 7.6m Fire Line)

Synthetic winch lines are now widely regarded as the safest option because of their lighter weight and when released, the winch line virtually falls to the ground with a fraction of the force of steel. The Viking Combo Line includes 7.6m of Fire Line which provides heat protection at the drum. The remainder of the line is Viking Trail Line® which is manufactured from Dyneema® SK-75 HMPE fibre "recognised as the world's strongest fibre" coated with Samthane™, to help resist abrasion. The line is finished with an aluminium winch safety thimble and includes a special drum attachment to secure the line to most leading makes of winches.

BA 2674 30m x 9.5mm



Rope Retainer

This simple device ensures that your winch line always maintains the minimum amount of wraps on the drum. It is all too easy to pull the winch line and forget to keep five wraps on the drum for safety. With the Rope Retainer installed you can pull your line to your anchor point with confidence that it won't pull loose. Great for hidden winch mounts or in situations where you can't watch your drum while feeding out winch line. The photos show how easy it is to install the Rope Retainer. Also works with steel cable.


BA 2679



Tree Strop

Wide heavy duty webbing will not damage trees. Nylon covered stitched eyelets at the ends. Breaking strain 10 Tonnes (2.5mx75mm)


BA 2153

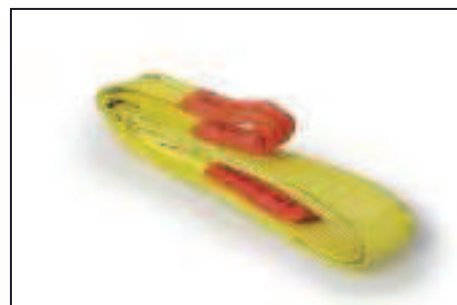

Winch Buddy

BA 2680

Dual purpose mechanism made from zinc plated box section steel. Cleverly folds to act as an anchor for the vehicle. Or when it's flat it doubles as a useful track to help you get out of tricky situations.



Ground Anchor Set

BA 2681

A sturdy kit to give your winch an anchor point when there's no other secure location.

Caravan Plug

BA 4000

12N 7-Pin



Aluminium Caravan Socket


BA 4001

12N 7-Pin

Plastic Caravan Plug

BA 4002

12N 7-Pin



Plastic Socket

BA 4003

12N 7-Pin

Plastic Caravan Plug

BA 4004

12S 7-Pin



Plastic Caravan Socket

BA 4005

12S 7-Pin

Trailing Caravan Socket

BA 4006

12N 7-Pin



Metal Trailing Caravan Socket

BA 4007

7-Pin

Metal Caravan Socket

BA 4008

7-Pin



Trailer Plug Plastic

BA 4009

5 Pole ABS

Trailer Socket Plastic

BA 3980

5 Pole ABS



Trailer Plug Plastic

BA 3981

7 Pole ABS

Trailer Socket Plastic

BA 3982

7 Pole ABS



Plastic Trailer Plug

BA 3983

24N 7-Pin

Plastic Trailer Socket

BA 3984

24N 7-Pin



Aluminium Trailer Plug

BA 3985

24N 7-Pin

Aluminium Trailer Socket

BA 3986

24N 7-Pin



Plastic Trailer Plug

BA 3987

24S 7-Pin

Plastic Trailer Socket

BA 3988

24S 7-Pin



Pre-wired socket

BA 3989

12N

Pre-wired socket

BA 3990

12N Plus audible sensor



Single mounting plate

BA 3991

Pre Wired Socket

BA 3992

12N + 12S



Universal Wiring Kit

BA 195

with Audible Warning

Universal Towing Bypass Relay

BA 195A



Bumper Protector

BA 3993

Magnetic Lighting Set

BA 3994

6ft Cable



Red Triangular Reflector

BA 3995

Pack of Two

Amber Rectangular Reflector

BA 3996

Pack of Two



Red Rectangular Reflector

BA 3997

Pack of Two



Retractable cable 7 core

BA 3998

3m with 2N Socket



Trailer extension lead 7 Core

BA 3999

6m 12N - Pre-wired

